


# Wicked Warnings Mini Thin LED Light

## Installation and Operation Instructions

**IMPORTANT:** Please read all of the following instructions before installing your new Mini Thin LED Light. **WARNING:** Failure to install or use this product according to manufacturer's recommendations may result in property damage, serious injury, and/or death to those you seek to protect!

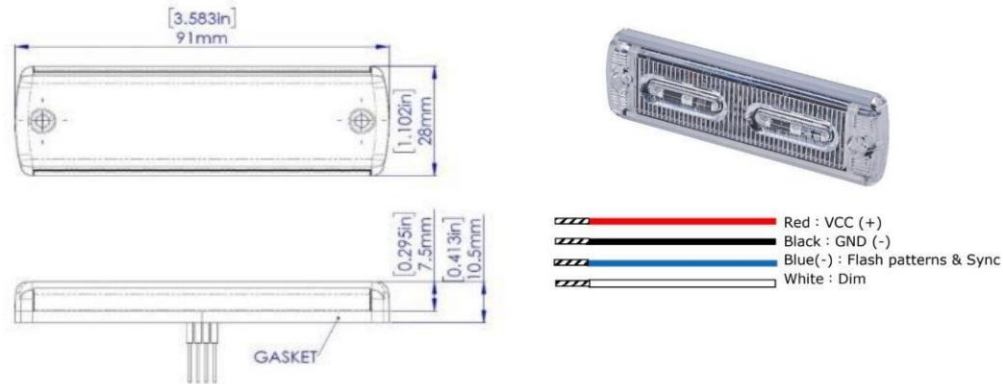

### FEATURES:

- Current is max 0.75A per light
- Operates Under 12v or 24v systems.
- Full 12 Month Warranty
- 22 Flash Patterns with polycarbonate lens

**How to Dim Lights:** Connect White wire to Black wire for Dimming

**How to Sync Lights:** Connect Blue wire together set to the same pattern, all the lights will sync. Sync lights only after all individual patterns have been set. MAX sync is 6 lights

**Flash Pattern Adjustment:** Connect Blue wire to Black wire for 0~1 sec. momentarily to select the next flash pattern, 1~3 sec. for the previous pattern, 3~5 sec. Factory default(P1), over 5 sec. OFF.

### FLASH PATTERN LIST

PA1	ECE R65 Single Flash PH1	PA12	SAE Single Flash Alt
PA2	ECE R65 Single Flash PH2	PA13	SAE Double Flash PH1
PA3	ECE R65 Single Flash Alt	PA14	SAE Double Flash PH2
PA4	ECE R65 Double Flash PH1	PA15	SAE Double Flash Alt
PA5	ECE R65 Double Flash PH2	PA16	SAE Quad Flash PH1
PA6	ECE R65 Double Flash Alt	PA17	SAE Quad Flash PH2
PA7	ECE R65 Quad Flash PH1	PA18	SAE Quad Flash Alt
PA8	ECE R65 Quad Flash PH2	PA19	MODUL Flash Sim
PA9	ECE R65 Quad Flash Alt	PA20	Modul Flash Alt
PA10	SAE Single Flash PH1	PA21	Steady Burn
PA11	SAE Single Flash PH2	PA22	Off

# WICKED WARNINGS